

855H SPECIFICATIONS >>>

ENGINE	
sees - , KAs	s ₁₄ - • •
LA A	
L , <	- 1
- A . ,	T 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
	T 1/, . 1/, 1///.
./	11 , - , 11 , 11 .
15, <1-	
	
. .	Ay

TRANSMISSION		
	,< 1 1 .	1 4 g 3
	/ X . A,	. <
LA _N	7 7	,/
LA,	7 . •	
- · · · · · · · · · · · · · · · · · · ·	,	1
2. • /5		

AXLES				
,, , , , κ ψ.			3	K
/s . s K	,	٠	3	K
· · · · · · · · · · · · · · · · · · ·			-	/

ST	EERING	
-	s , z , p , .As	< 1
-	s, - 6 ,	, - L, A

BRAKES	
• \ .A	, K,
• 45= \ A A5	
, A. s., \ .A	,.
, A. s , \ .A As	L 1 ;-K

HYDRAULIC SYSTEM	
L As	ц 1.
LAs - S. J	_ / L, A
- A.	1.
/ 5	
K A ≠ 5	<u> </u>
uk K	, /

LOADER ARM PERFORMANCE WITH STANDARD BUCKET 3	.0 m³
, , A, , A, , , A, , , , , , , , , , ,	· /// ,
3 3, A, u«	11 ,
\ - \ . A U	
· LAge is a property.	1001
\ / \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	- 4.
, / - A-, A U « / y , / y - , Ay	6
/ LAR / //// . I - · · ·	/
• \ «-A- A u. / · · ·	/1.
• \ «-A- A , A	, 1
- \ « - A - A LAN / y .	7
-, LA _R / / / / / A u « / b .	7.5


BU	CKE	T PERF	ORMANCE			
_		- \	-	1.47	/ -	

DIMENSIONS	
u	-
ц Т. <.А.	• ₁ /
1 . A-1 . y .	- 1/
I T . ← . A.	1. /
, T ₃₂ , .	1. /
,	1.1.
L , <	. /
, ~ A., ,< / A	_ /
-, , - An . \ - , A	-, 4
\sim \sim \sim \sim \sim \sim \sim	- 11-
$T^{T}T_{\mathcal{F}}$. L_{T}	1/

TIRES	
3 c = 103 p	1 9 / -
OPERATING WEIGHT	

OPERATING W	EIGHT	
A, T	y •	· · /, ,

SERVICE CAPACITY	
ц < 🛦	1//
- , s · \	1-
, S,	, /
,	- 1
A . s	,
. K. u. → A.	

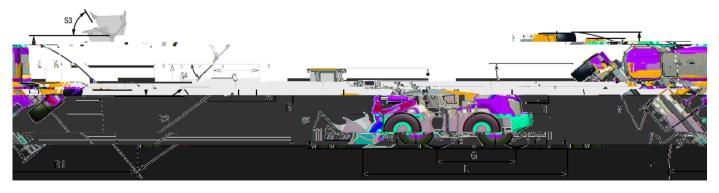

Guangxi Liugong Machinery Co., Ltd.