

855H SPECIFICATIONS >>>

ENGINE	
- 3003 - , KAS	s ₁₄ - • •
LA A	
L , <	- 1
- A . ,	T 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
	T 1/, . 1/, 1///.
./	11 , - , 11 , 11 .
15, <1-	
. 6 / .	
. .	Ay

,< ∆ ∆ .	* * * *
/ s . 1,	. < ,
	,/ .
	1
	/

AXLES				
,, , , , κ ψ.			3	K
/s . s K	,	٠	3	K
· · · · · · · · · · · · · · · · · · ·			-	/

STEERING	
• A , A . W. A .	
·	- L, A

BRAKES	
• \ .A	, K
• As= \ A As	· / Se
, A. s. , \ .A	, .
, A. s , \ .A As	L -, 1 ; -K

HYDRAULIC SYSTEM	
LA	ц 1.
LAS - Sometime	, / L, A
- A ₅ ,	/,
, ,	•
⊈ Å / ,	<u> </u>
ц А , , К , З ,	, /


LOADER ARM PERFORMANCE WITH STANDARD BUCKET 3.0 m ³		
1 1, Au . = Ay . = 1, = 1/2	_ /// ,	
- Lag var par sy.		
\ / \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	4,	
	- 4	
	/	
• \ «-1- 1 u	/1.	
• \ « - \ - \ . \	, /	
- \ « - A LAN / y.	71 -	
· LAN / / / / / Au w/ y.	1,-	

BL	JCKET PERFORMANCE	
_	\ -	1.7/-
		ı

DIMENSIONS	
u / _< A.A ~	
ц Т , < Д,	- 1 /
, And Sy.	- 1/
l Τ , ← . Δ.	1. /
. T,,	1. /
, \ - /	1.1-
L , <	• 1
, ~ A., ,< , A	_ /
, . 10 . 1 - , 1	-, 4
\sim \sim \sim \sim \sim \sim \sim	- 11-
$T^{1}T_{\mathcal{F}^{\prime}}$, $L_{F^{\prime}}$	1/

TIRES	
y	1 4 /200
OPERATING WEIGHT	

SERVICE CAPACITY	
u < 1	1//
- /s \\	1-
, S,	, /
, , , A S = .	- 1
A . See . A	,
. , . u. ¬ . A.	

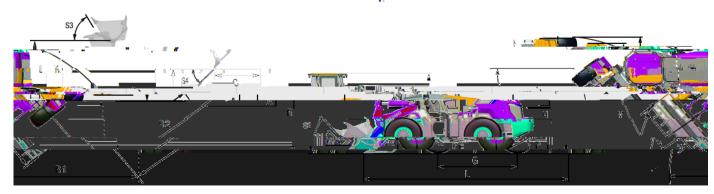

الم در حربه المراجع و الله المراجع و الم المراجع و المراجع و